


Rig # 4

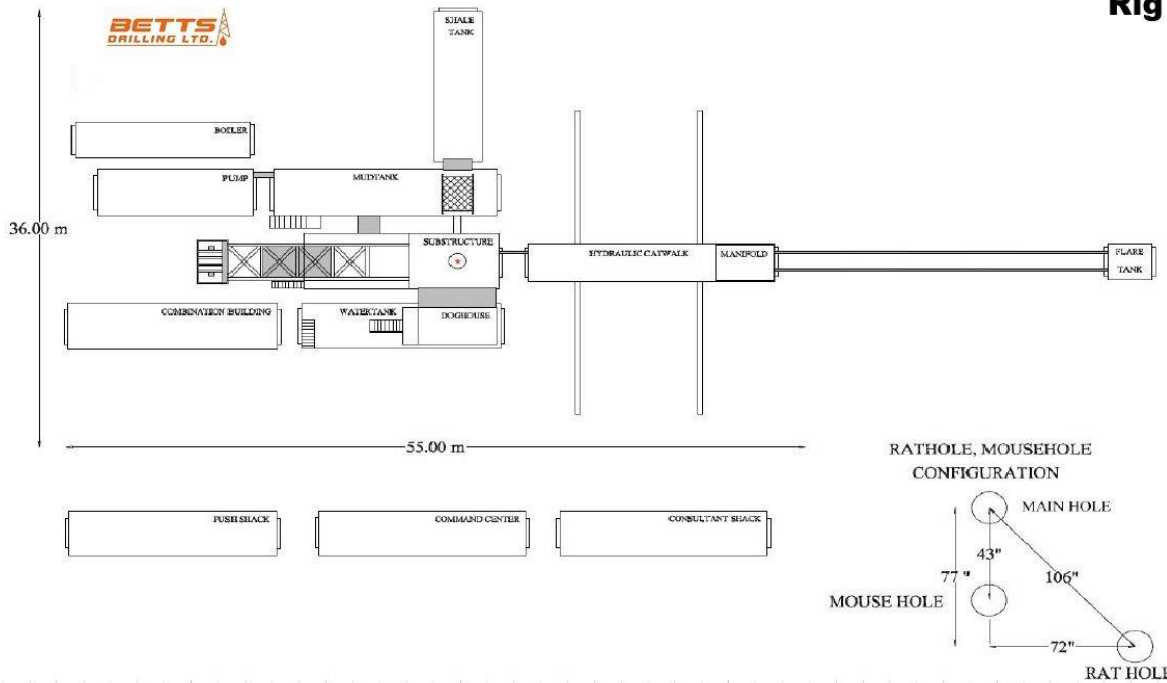

Drawworks:

Engine:

Mast:

Height:

Max Hook Load:

Substructure:

Max Setback:

KB:

API Certified

Hydraulic Levelling

Rotary Table

Pump:

Engine:

Mud System:

Shaker:

Pumps:

Trip Tank:

Pill Tank:

Suction Tank:

Settling Tank:

Shaker Tank:

Agitators:

Generator:

Engine:

Ratmaster 750 HP

Cummins QSK-19 750 hp

Hodgson Tele Double

106'

178,000 daN

Hodgson MT106-5-400G

400,000 lbs

4.9 meters

4F, 3rd Edition

Yes

17-1/2"

RLF - F1000

Detroit 2000 1005 HP

65m3

Swaco Mongoose

2 - 5x6 Centrifugal

6.12 m3

6.27 m3

15.1 m3

16m3

15.8 m3

7.5 hp

450 KW

Cummins QSX 15

Well Control:

Annular:

Pipe Rams:

Manifold:

Tubulars:

Collars:

Drill Pipe:

HWDP:

Overhead:

Hook Block:

Swivel:

Drilling Line:

Miscellaneous:

Water Tank:

Fuel Tank:

Features:

Hydraulic Catwalk

Rig Loads:

Rig:

Boiler:

Loader ,Shack & Misc

Depth Rating:

Notes: All Equipment API Certified

Class IV Nace

229mm X 21,000 kPa

114 mm

76mm X 50mm X 21,000 kPa

4" G105

15 x 159mm x 4-1/2" xh

400 - 114mm x 4" FH

60 - 114mm x 4" FH

178,000 daN

200,000 daN

1-1/8"

81 m3

20,000 Litres

15

1

3

4000 Meters